
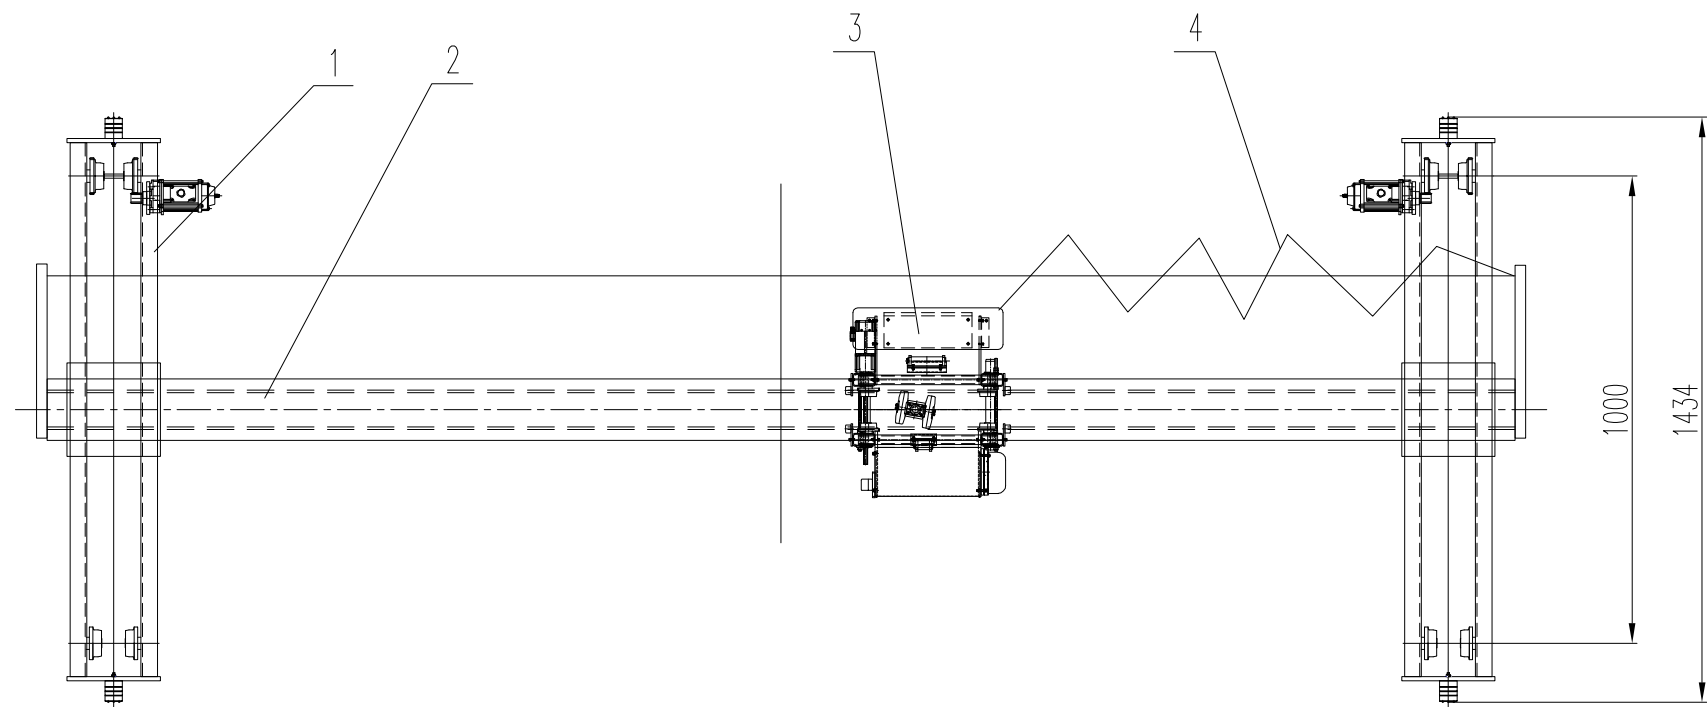
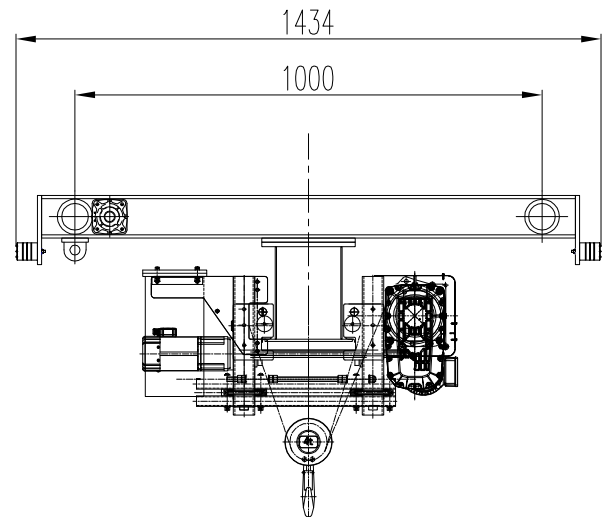


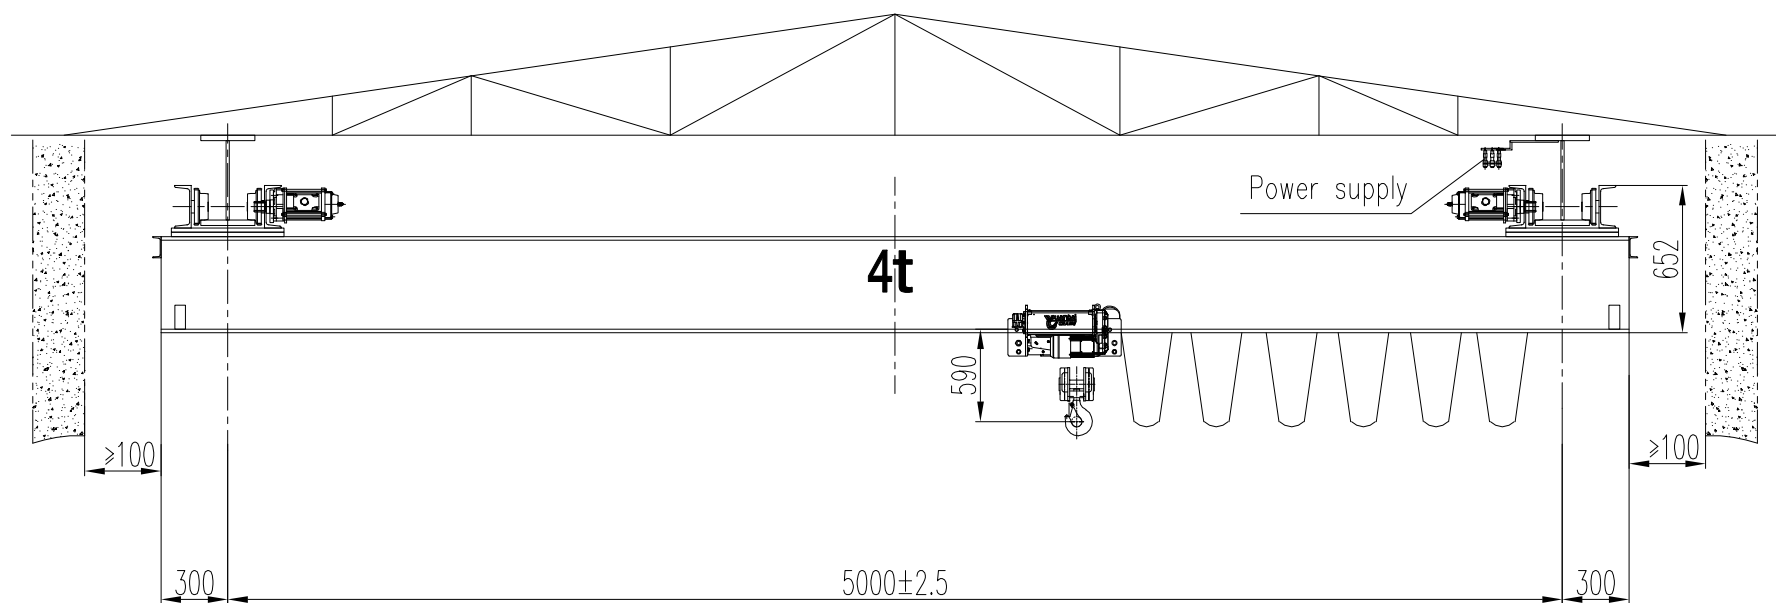

- Note:
- Distance from workshop backspin to crane peak should ≥200mm
 - Control mode: pendent control & remote control

Technical Parameters					
Crane Travelling			Electric Hoist		
Span (m)		5	Type		NR4t
Travelling Speed (m/min)		2.0~20	Lifting Speed (m/min)		0.8/5.0
Buffer Stroke (mm)		60	Lifting Height (m)		5
Max. Wheel Load (kN)		29.8	Lifting Motor	Type	NR
Rail Width (mm)		150~400		Power (kW)	0.8/4.9kW
Wheel Diameter (mm)		8*130	Travelling Speed (m/min)		1.0~10
Crane Travelling Motor	Type	SX030	Hoist Travelling Motor	Type	NR
	Power (kW)	2*0.4kW		Power (kW)	0.45kW
	Rotation Speed (r/min)	1415	Power Supply		
Crane Travelling Reducer		Type SX030			
		Ratio			
		7.7			

4		Electric system	Subassembly	1			
3		Hoist	Subassembly	1			
2		Girder	Subassembly	1			
1		End beam	Subassembly	2			
Part Number	Drawing number	Description	Material	Qty	Single Weight (kg)	Total	Remarks