

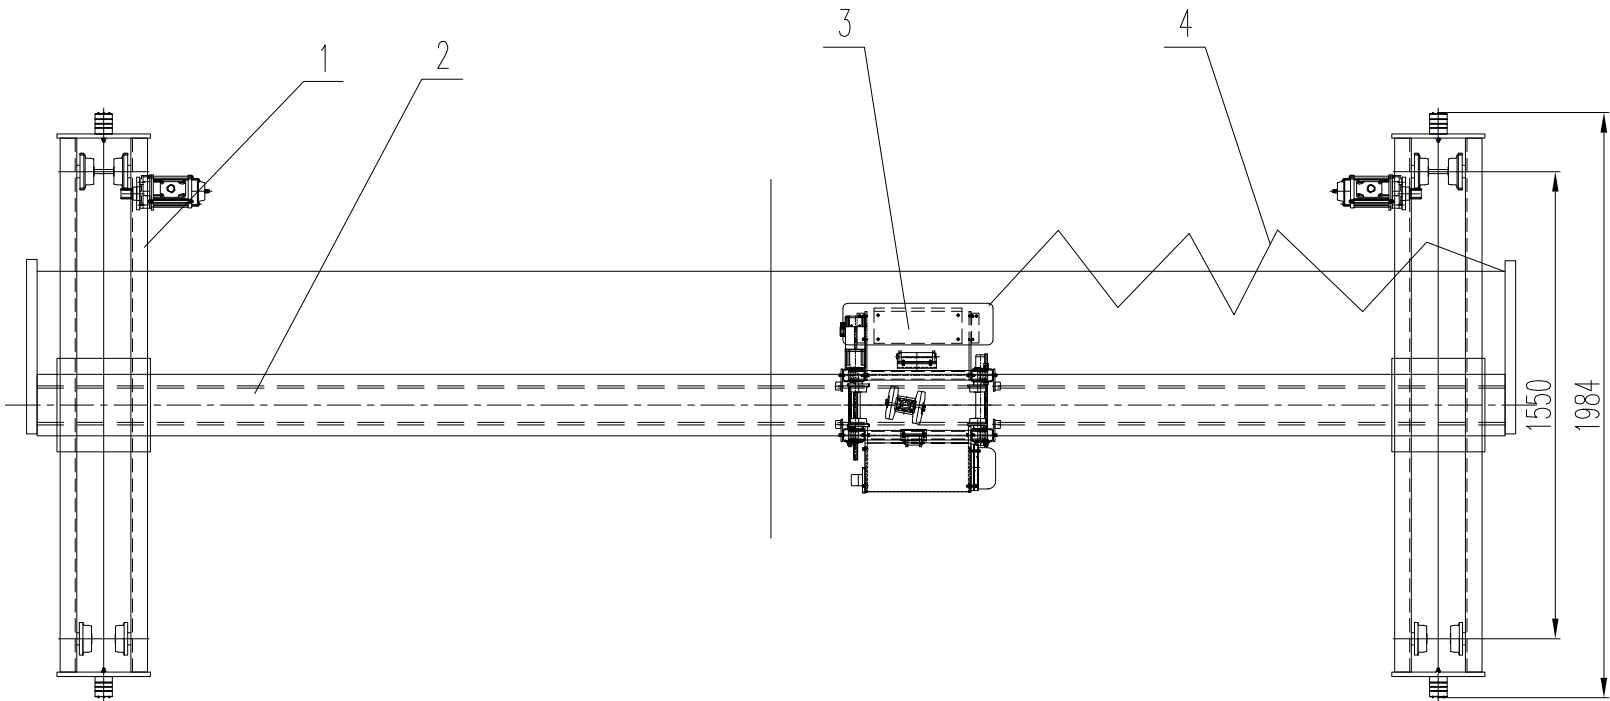


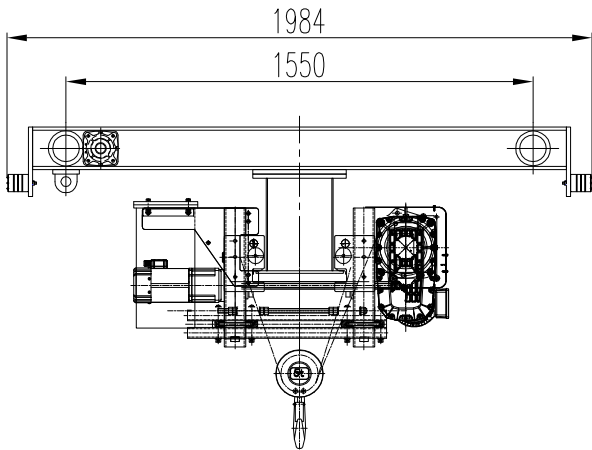

Technical Parameters				
Crane Travelling			Electric Hoist	
Span (m)	10	Type	NR5t	
Travelling Speed (m/min)	2.0~20	Lifting Speed (m/min)	0.8/5.0	
Buffer Stroke (mm)	60	Lifting Height (m)	6.5	
Max. Wheel Load (kN)	36.3	Lifting Motor	Type	NR
Rail Width (mm)	200~400		Power (kW)	0.8/4.9kW
Wheel Diameter (mm)	8*130	Travelling Speed (m/min)	2.0~20	
Crane Travelling Motor	Type	Hoist Travelling Motor	Type	NR
	Power (kW)		Power (kW)	0.45kW
Crane Travelling Reducer	Rotation Speed (r/min)	Power Supply	3P 380V 50Hz	
	Ratio			

- Note:
- Distance from workshop backspin to crane peak should $\geq 200\text{mm}$
 - Control mode: pendant control & remote control

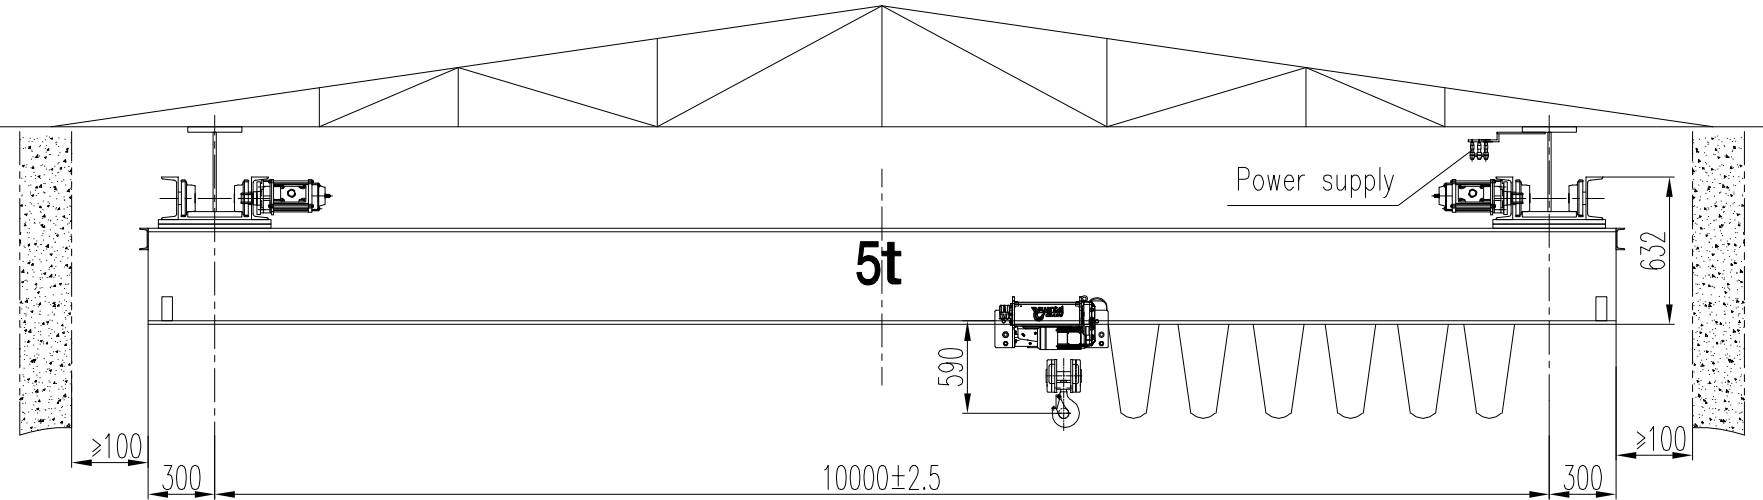

4		Electric system	Subassembly	1			
3		Hoist	Subassembly	1			
2		Girder	Subassembly	1			
1		End beam	Subassembly	2			
Part Number	Drawing number	Description	Material	Qty	Single Weight (kg)	Total	Remarks
Amended Mark	Qty	Zone	Amended file	Signature	Date	NLX single girder under hang crane NLX5t-10m A5	
Designed by			Standardized by				
Drawn by			Electrical Designer			General layout	
Checked by			Reviewed by				
Quality Assurance			Approved by			Project Title:	

Yuantai CRANE Yuantai Crane Machinery			
Sheet 1 of 1	Weight	Scale	
Edition		2440kg	Not In Scale