

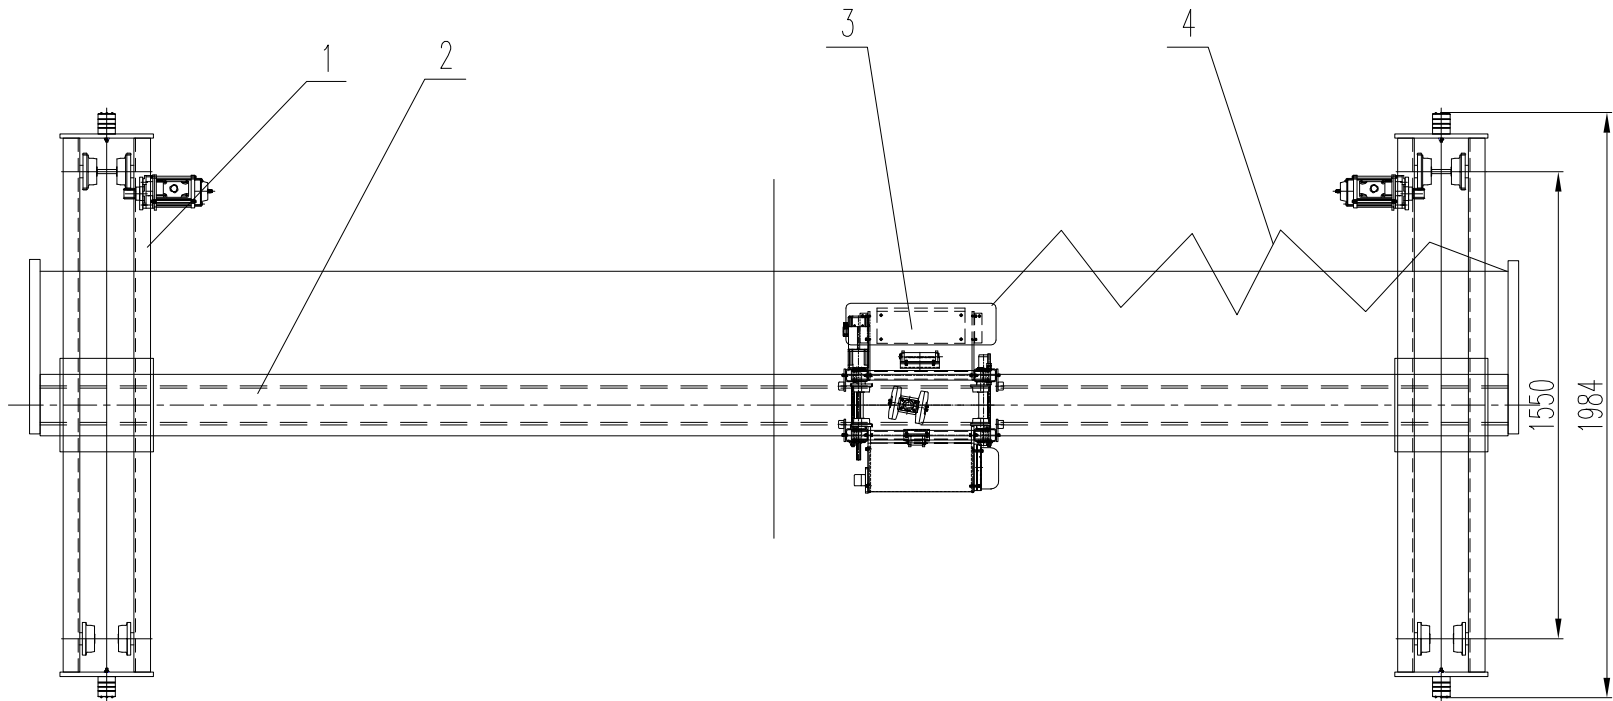


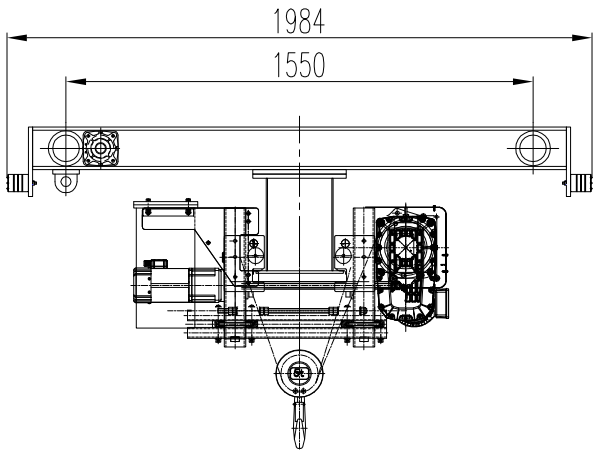

Technical Parameters					
Crane Travelling			Electric Hoist		
Span (m)	3.6		Type	NR5t	
Travelling Speed (m/min)	2.0~20		Lifting Speed (m/min)	0.8/5.0	
Buffer Stroke (mm)	60		Lifting Height (m)	6	
Max. Wheel Load (kN)	33.8		Lifting Motor	Type	NR
Rail Width (mm)	200~400			Power (kW)	0.8/4.9kW
Wheel Diameter (mm)	8*130		Travelling Speed (m/min)		2.0~20
Crane Travelling Motor	Type	SX030	Hoist Travelling Motor	Type	NR
	Power (kW)	2*0.4kW		Power (kW)	0.45kW
Crane Travelling Reducer	Rotation Speed (r/min)	1415	Power Supply	3P 380V 50Hz	
	Type	SX030			
	Ratio	7.7			

- Note:
- 1. Distance from workshop backspin to crane peak should ≥200mm
 - 2. Control mode: remote control

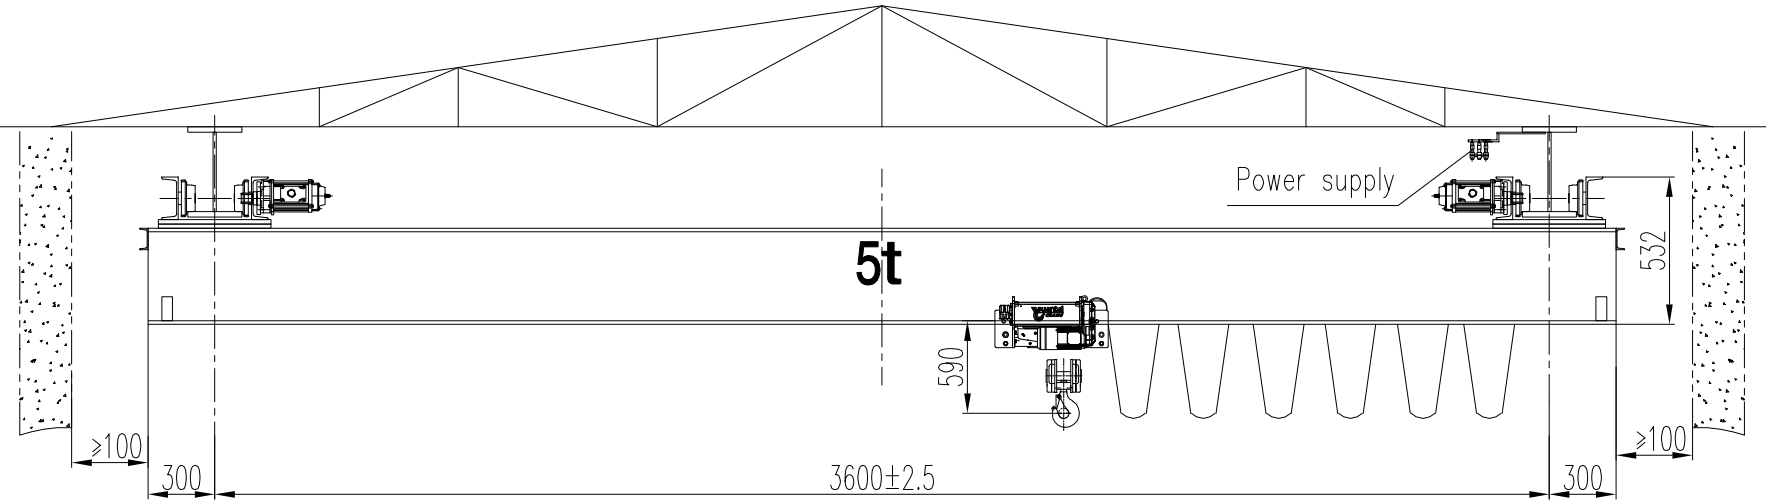

4		Electric system	Subassembly	1			
3		Hoist	Subassembly	1			
2		Girder	Subassembly	1			
1		End beam	Subassembly	2			
Part Number	Drawing number	Description	Material	Qty	Single Weight (kg)	Total	Remarks
Amended Mark	Qty	Zone	Amended file	Signature	Date	NLX single girder under hang crane NLX5t-3.6m A5	
Designed by			Standardized by				
Drawn by			Electrical Designer			General layout	
Checked by			Reviewed by				
Quality Assurance			Approved by			Project Title:	



Yuantai Crane Machinery

Sheet 1 of 1

Weight

Scale

Edition

1980kg

Not In Scale

Drawing Number: NLX5-3.6 A5

Project Title: