



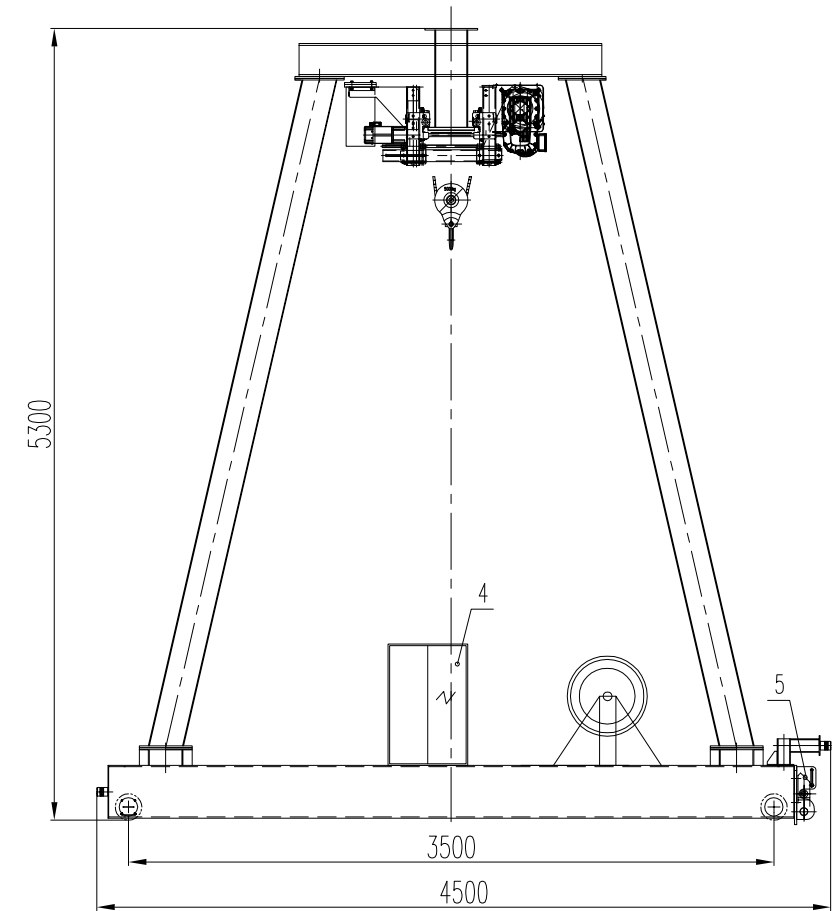

Technical Parameters					
Crane Travelling			Electric Hoist		
Span (m)		4.65	Type		European spec hoist 5t
Travelling Speed (m/min)		5.0~20	Lifting Speed (m/min)		1.6~10
Buffer Stroke (mm)		30	Lifting Height (m)		4.0+25
Max. Wheel Load (kN)		40.3	Lifting Motor	Type	NR
Rail Type		P22(Recommending)		Power (kW)	9.5kW
Wheel Diameter (mm)		4*Ø200	Travelling Speed (m/min)		5.0~20
Crane Travelling Motor	Type	SZW-100	Trolley Travelling Motor	Type	NR
	Power (kW)	2*0.75kW		Power (kW)	0.64kW
	Rotation Speed (r/min)	1350	Power Supply		
Crane Travelling Reducer	Type	LDA			
	Ratio	58.95			

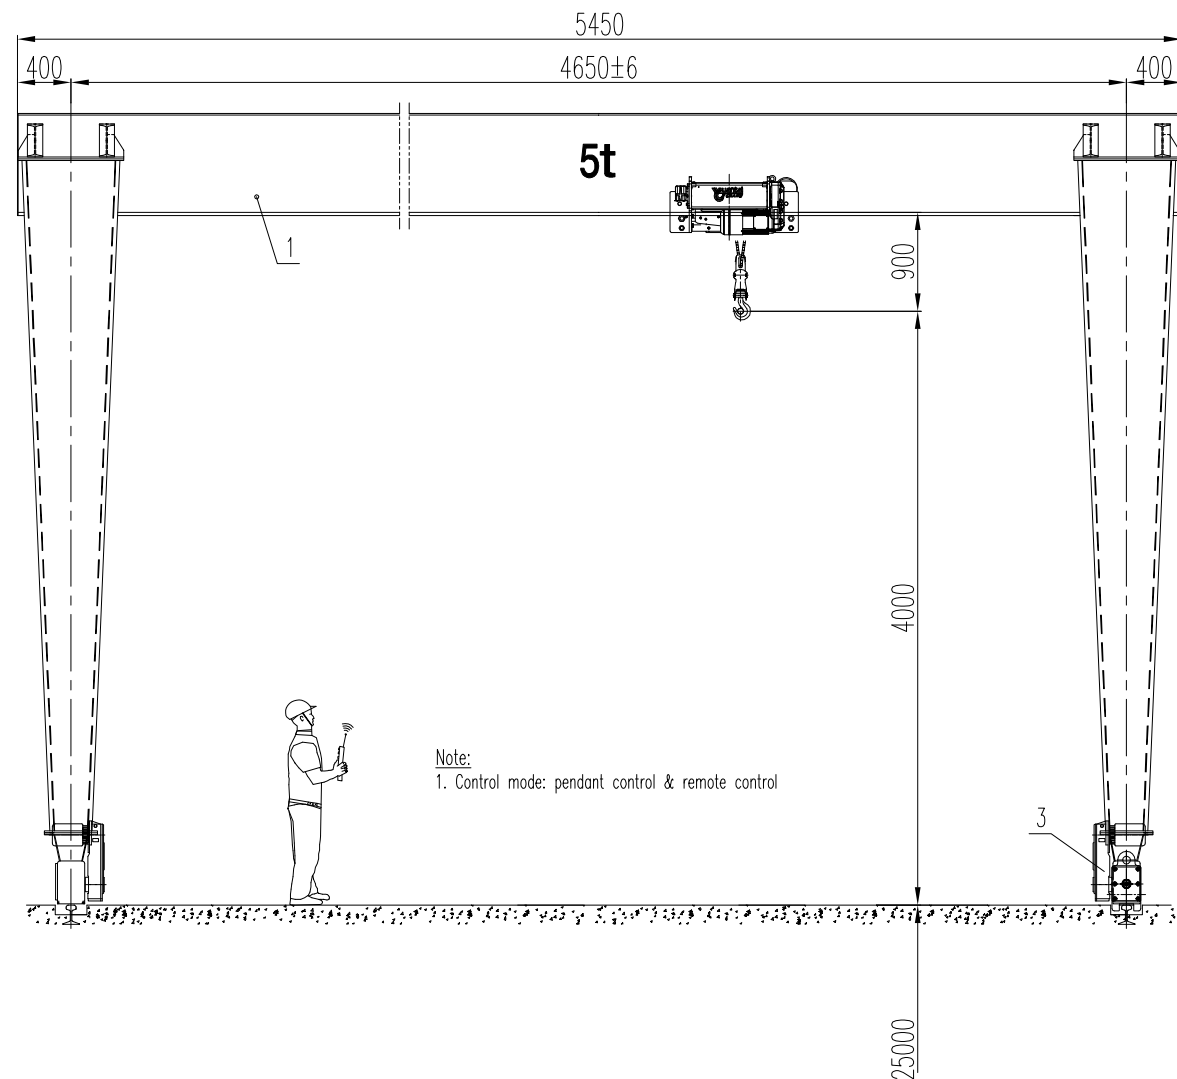

5		Anti-wind devices	Subassembly	1					
4		Power supply	Subassembly	1					
3		Long travel mechanism	Subassembly	1					
2		Electric hoist	Subassembly	1					
1		Gantry frame	Subassembly	1					
Part Number	Drawing number	Description	Material	Qty	Single	Total	Remarks		
					Weight (kg)				
			MHO Single Girder Gantry Crane	MHO 5t-4.65m A5		Yuantai Crane Machinery			
Amended Mark	Qty	Zone	Amended file	Signature	Date	Sheet 1 of 1			
Designed by			Standardized by			Weight	Scale		
Drawn by			Electrical Designer			Edition			
Checked by			Reviewed by			5.3t	Not In Scale		
Quality Assurance			Approved by			Drawing Number: MHO 5-4.65 A5			
						Project Title:			