

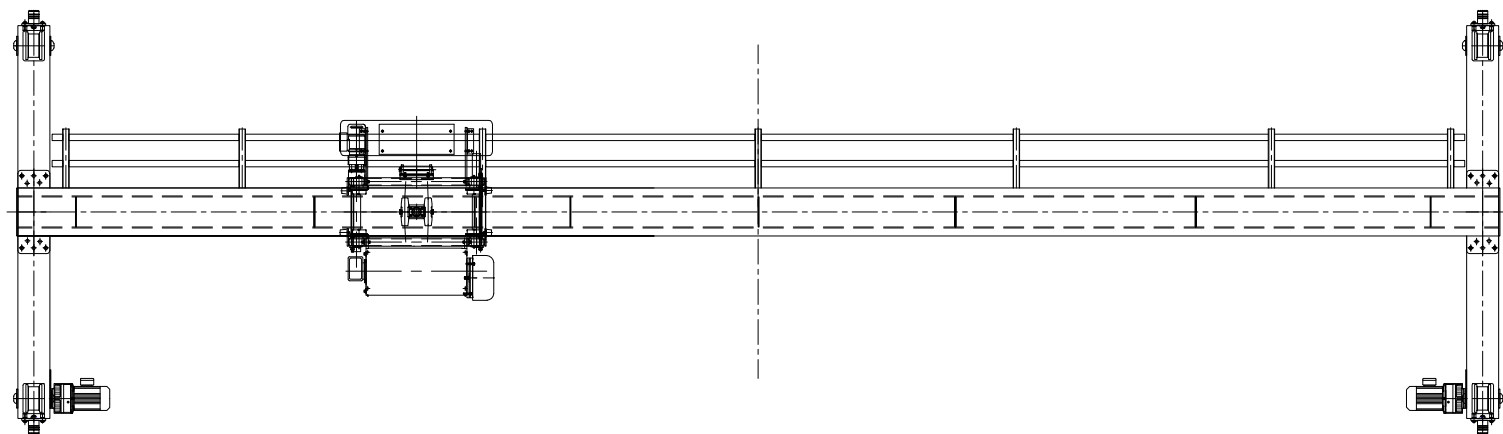


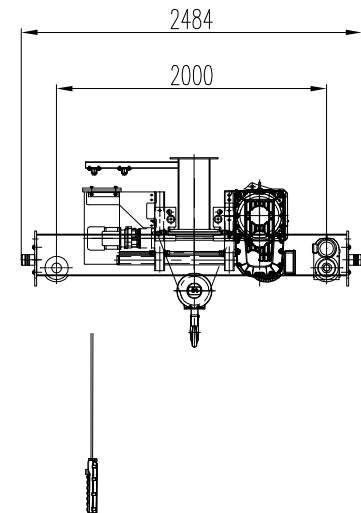

TECHNICAL DATA 技术参数

LOAD 载重	5 t
SPAN 跨度	13.36 m
LIFTING HEIGHT 起升高度	5.6 m
WEIGHT OF GIRDER 主梁重量	1.85 t
WEIGHT OF CRAB 小车重量	0.46 t
WEIGHT OF END TRUCK 端梁重量	0.48 t
WEIGHT OF ELECTRIC BOX 电气重量	0.08 t
WEIGHT OF CRANE 总重量	2.87 t
THE MAXIMUM WHEEL LOAD 最大轮压	36.9 kN
MAIN LIFTING SPEED 主提升速度	0.8/5.0 m/min DUEL SPEED
TROLLEY TRAVERSING SPEED 小车速度	2.0~20 m/min STEPLESS
BRIDGE TRAVELLING SPEED 起重机构速度	2.0~20 m/min STEPLESS
LIFTING POWER 主升功率	0.8/4.9 kW
TROLLEY MOTOR POWER 小车电动机功率	0.45 kW
BRIDGE MOTOR POWER 大车电动机功率	2*0.4 kW
SUPPLY POWER 总功率	6.95 kW
POWER SUPPLY 供电	400V / 3P / 50Hz
CRANE GROUP 整机工作级	FEM 2m (A5)
LIFTING GROUP 起升工作级	FEM 2m (M5)
TROLLEY TRAVERSING GROUP 小车工作级	FEM 2m (M5)
BRIDGE TRAVELING GROUP 大车工作级	FEM 2m (M5)
CONTROL METHOD 控制方式	Pendant control
CRANE RAIL 大车轨道	P15 (Proposing rail)
WORKING SITE 使用环境	Indoors 室内

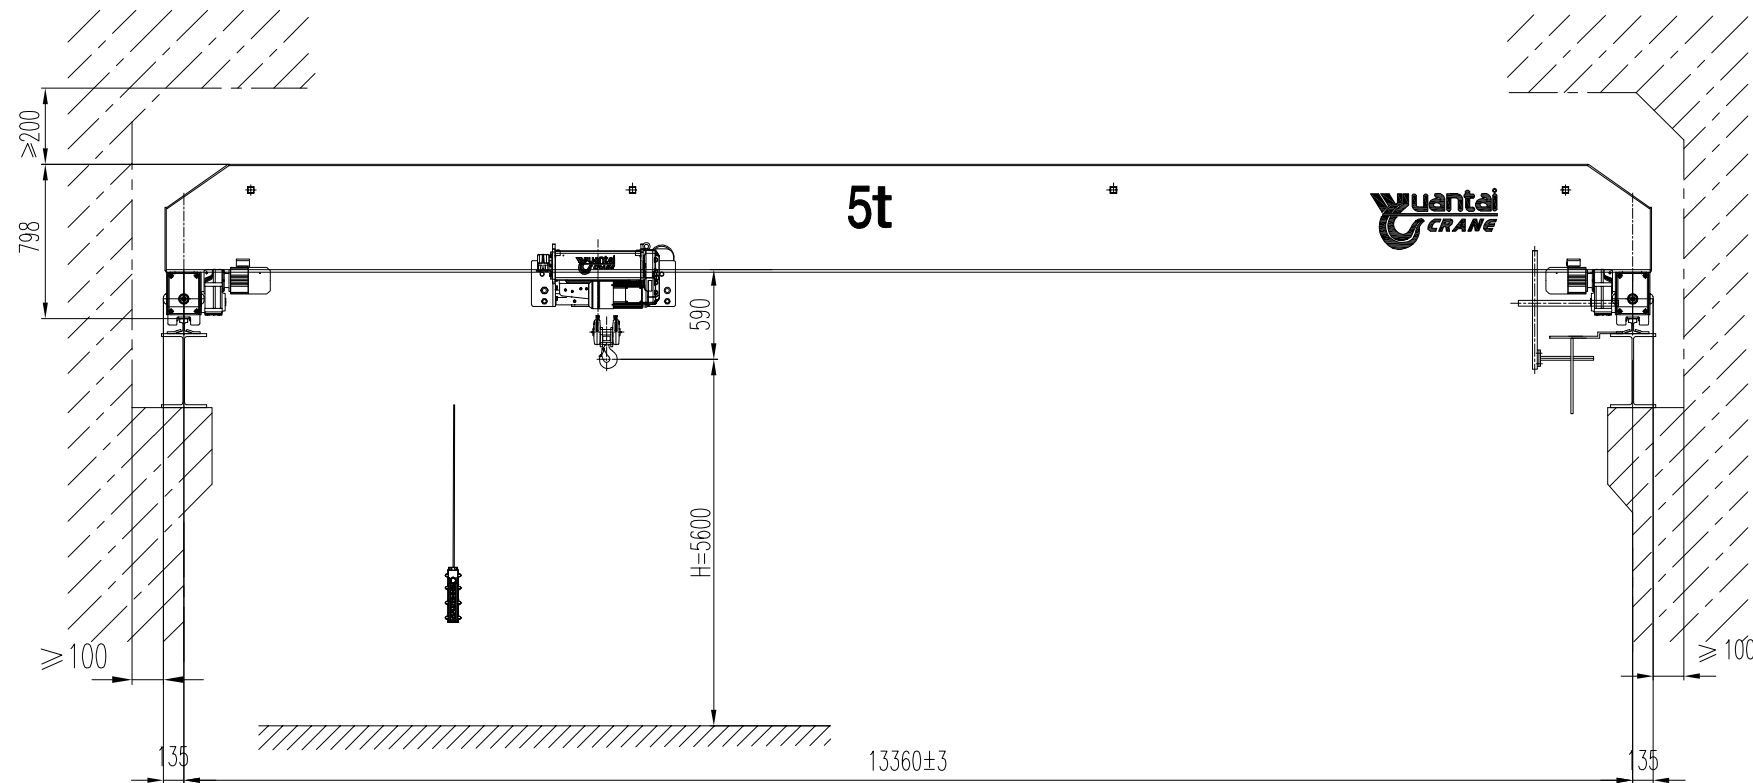

						HD Explosion-proof Single Girder Overhead Crane HD5t-13.36m A5 ExdIIBT4	Yuantai Crane Machinery			
							Sheet 1 of 1			
							Weight		Scale	
Amended Mark	Qty	Zone	Amended file	Signature	Date		Edition			Not In Scale
Designed by			Standardized by			General layout	Drawing Number: HD5-13.36 A5 EX			
Drawn by			Electrical Designer							
Checked by			Reviewed by							
Quality Assurance			Approved by				Project Title: Pakistan			